

TM-CB M2/7-006-01 ANTHRACITE
TM-CM.0200706DA



No: 33A23



No: 5251/2024
Valid until:
20.12.2028



No: 33A23



No: 33A23



No: 063-UWB-0591
Valid until:
20.12.2028



No: CBM-01/24



Producer	TM Technologie
Application	central battery
Colour/Colour - RAL	anthracite , RAL7016
Appliance classes	I
Protection degree	IP30
Warranty (body, electronics)	60 months
Net dimensions L x W x H [±2 mm]	400 mm x 196 mm x 1012 mm

POSSIBILITIES

Software included	Visual Base
Maximum number of emergency fittings in the system	120 pcs.
Maximum number of emergency fittings circuit and channel	20 pcs.
Maximum number of substations and signal distributors	1 pcs.
Maximum distance between control panel and luminaire	300 m
*Maximum distance between control panel and luminaire using the repeater function	1000 m
I/O module using possibility	yes
Allowed topology	parallel connection, star connection
Maximum luminaires power CB 1h	960 W
Maximum luminaires power CB 2h	500 W
Maximum luminaires power CB 3h	380 W
Maximum luminaires power CB 8h	170 W

TM-CB M central battery system
modern design, advanced electronics

Power supply, control and monitoring of circuits and emergency luminaires of evacuation lighting in public utility buildings.

- » central supervision of all circuits and emergency luminaires connected to the system
- » system equipped with batteries that provide the appropriate amount of energy needed for a specific time of operation of emergency luminaires
- » intelligent monitoring systems that provide information on the condition of batteries, luminaires, and possible faults
- » various system configurations, which can be adapted to the individual needs of the building, its size and specific requirements for emergency lighting.


TELECOMMUNICATION CABLES

<i>Telecommunication cables with appropriate fire classification and circuit integrity in case of fire (if applicable)</i>	
Control panel - substation subdistribution signal distributor cable	1 x 2 x 0,8 mm ²
Maximum length of communication cable	1000 m
Maximum resistance	75 Ω
Maximum conductor capacitance	140 nF/km

POWER CABLES

<i>Power cables with appropriate fire classification and circuit integrity in case of fire (if applicable)</i>	
AC power cable cross section	3 x 2,5 - 6,0 mm ²
Type and cross section of luminaires power cable	3 x 0,5 - 4,0 mm ²
Communication protocol	TCP IP/MODBUS, RS485, PLC, USB

TOPOLOGY

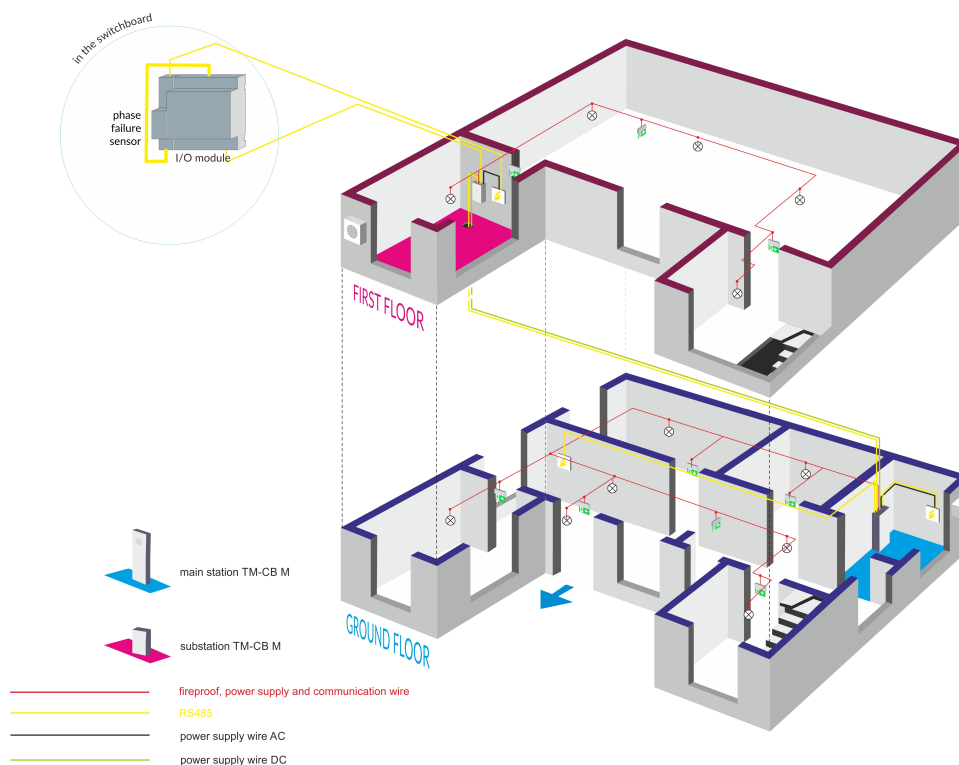

TM-CB M SUB PR12 ANTHRACITE TM-CM.1200012DA



Sub-distribution TM-CB M PR12

The sub-distribution board enables the system to be extended by another 12 circuits.

- » number of circuits: 12
- » maximum number of luminaires on one circle: 20
- » colour: anthracite

TM-CB M SUB PR20 ANTHRACITE TM-CM.2000020DA



Sub-distribution TM-CB M PR20

The sub-distribution board enables the system to be extended by another 20 circuits.

- » number of circuits: 20
- » maximum number of luminaires on one circle: 20
- » colour: anthracite

TM-CB M CIRCUIT MANAGER 1x6A TM-MN.CB.KOB002



Circuit manager MCL-H

A device that controls the operation of output circuits. Depending on the operating mode, it switches on the appropriate type of voltage (AC or DC), controls the monitored CBM luminaires, performs DC current measurements and activates the modified mode.

- » number of electrical circuits: 1
- » maximum load of each circuit: 6 A
- » ground fault detection
- » internal fault detection

TM-CB M CIRCUIT MANAGER 2x3A TM-MN.CB.KOB003



Circuit manager MCL-C

A device that controls the operation of output circuits. Depending on the operating mode, it switches on the appropriate type of voltage (AC or DC), controls the monitored CBM luminaires, performs DC current measurements and activates the modified mode.

- » number of electrical circuits: 2
- » maximum load of each circuit: 3 A
- » ground fault detection
- » internal fault detection


TM-PROG RFID CB|DATA2|DALI TM-MN.RFID003



TM-PROG RFID is a programming device used to read and addresses of lighting fittings that are compliant with TM-CB | DATA2 | DATA2 RADIO| DATA3 | DATA3 RADIO | DALI | DALI-2 systems.

- » Programming is executed in a wireless mode that provides for operation without connecting lighting fittings to a power supply.
- » The programming device has a built-in battery that offers long operating time, and the current consumption is shown on a display.
- » The programming device has an ergonomic casing that protects the device against mechanical damage and prevents accidental slipping from the hand.

SET OF VTM CONTROL MODULES CB0 TM-MN.CB02M2

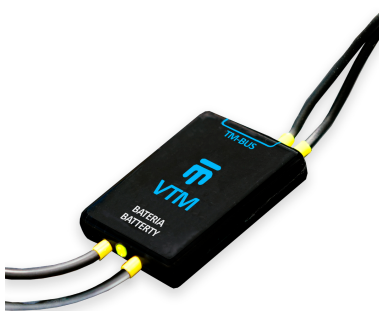

Batteries voltage and temperature measurement

- » number of control modules: **18 pcs.**
- » compatible with model **TM-CB M2**
- » installation: directly on the batteries

AKU AGM 12V 7.0-7.2AH TM-AAL7A2.UN.B1



BATTERIES | power supply for luminaires included in the system

Battery made in VRLA (AGM) technology, compatible with TM-CB models:

- » TM-CB M 2/7-006-01
- » TM-CB M 3/7-112-01
- » TM-TM-CB L1-48/07 FEL
- » TM-TM-CB L1-48/07 SEL

Producer's datasheet:



VISUALSITE TM-MN.VS001



VisualSite | Emergency Lighting Visualization System

- » interface for integration and management of multiple emergency lighting systems,
- » supervising, monitoring and managing the status of the central battery equipment,
- » accessible via a web browser,
- » compatible with models
TM-CB M1|M2|M3|M4|M5|M6|M7|M8|M9|M10.

*Tablet and computer are not included in the product.