

ONTEC D C1 60 NM AT L TM-OD.C1ATN600L



No: 0125



No: 4397/2021
Valid until:
11.09.2026



No: 88-128463



No:
B_BK_60112_0424_2024
Valid until:
24.01.2030



No: 0125



No: 2291559.02-
UAE
Valid until:
05.11.2026




No: 0125




No: DIT_001



No: V1.14

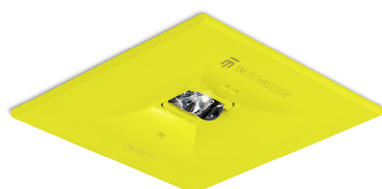

Producer	TM Technologie
Application	escape route lighting
Family	ONTEC D
Colour/Colour - RAL	yellow , RAL1016
Version	autotest
Operating mode	NM
Duration time	1 h
Protection degree	IP20
Impact protection degree	IK03
Appliance classes	II
Material	plastic
Installation method*	flush-mounted, ceiling
Luminous flux emergency	297 lm
Light source	LED
Maximum light power	2.4 W
Active power	1.2 W
Nominal voltage AC	210-250 V
LED lifetime	50000 h
Colour temperature	5700 K
Minimum temperature	+10 °C
Maximum temperature	+35 °C
Battery	LiFePO4/C (LN) 3.2V 1.5-1.6Ah
Warranty (body, electronics, light source)	36 months
Net dimensions L x W x H [±2 mm]	90 mm x 90 mm x 14 mm





					
2,5		9,5	21	-	-
3		11	24	-	-
4		13	29	-	-
5		13,5	32	-	-
6		10,5	34	-	-
7		5	32	-	-
8		3	26	-	-
9		4	19	-	-
10		-	-	-	-

Emin ≥ 1 lx