

ONTEC D C1 CB I

TM-OD.C1CB0000I



No: 0125



No: 4397/2021
Valid until:
11.09.2026



No: 88-141435
Valid until:
28.02.2027



No:
B_BK_60112_0424_2024
Valid until:
24.01.2030



No: 0125




No: 2291559.01-
UAE
Valid until:
28.10.2026



No: 0125





No: V1.14

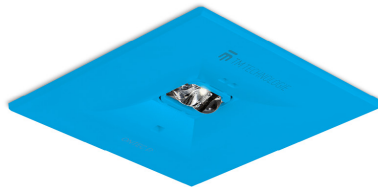

Producer	TM Technologie
Application	escape route lighting
Family	ONTEC D
Colour/Colour - RAL	blue , RAL5015
Version	CB - central battery
Operating mode	CB
Protection degree	IP20
Impact protection degree	IK03
Appliance classes	II
Material	plastic
Installation method*	flush-mounted, ceiling
Luminous flux emergency	297 lm
Light source	LED
Maximum light power	3 W
Active power	4.6 W
Nominal voltage AC	210-250 V
Nominal voltage DC	186-254 V
LED lifetime	50000 h
Colour temperature	5700 K
Minimum temperature	-15 °C
Maximum temperature	+55 °C

Warranty (body, electronics, light source)	60 months
Net dimensions L x W x H [±2 mm]	90 mm x 90 mm x 14 mm



h	a	b	c	d
2,5	9,5	21		
3	11	24		
4	13	29		
5	13,5	32		
6	10,5	34		
7	5	32		
8	3	26		
9	4	19		

* Some of mounting methods are possible only with additional accessory-dedicated for that product.