

# INDUST R 1DF CB H

## TM-RP.DFCB0100H



No: 2625



No: 4956/2023  
Valid until:  
10.05.2028




No: 2625



No: 2625




No: V1.0

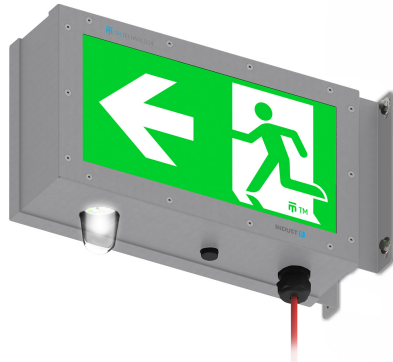

|                            |                                             |
|----------------------------|---------------------------------------------|
| Producer                   | TM Technologie                              |
| Category                   | emergency luminaires                        |
| Application                | evacuation route direction, tunnel lighting |
| Family                     | INDUST R                                    |
| Colour structure           | raw                                         |
| Version                    | CB - central battery                        |
| Operating mode             | CB                                          |
| Protection degree          | IP66, IP69                                  |
| Impact protection degree   | IK08                                        |
| Appliance classes          | I                                           |
| Material                   | stainless steel                             |
| Installation method*       | surface, wall                               |
| Adapted to use a pictogram | yes                                         |
| Pictogram dimensions       | 315, 6X174, 6 mm                            |
| Evacuation sign dimensions | 300x150 mm                                  |
| Pictogram type             | foil                                        |
| Luminous flux              | >200 cd/m <sup>2</sup>                      |
| Visibility                 | 30 m                                        |
| Colour temperature         | 5700 K                                      |
| Nominal voltage AC         | 220-240 V                                   |
| Nominal voltage DC         | 186-254 V                                   |
| Light source               | LED                                         |
| Maximum light power        | 0.8 W                                       |
| LED lifetime               | 50000 h                                     |
| Minimum temperature        | -25 °C                                      |
| Maximum temperature        | +45 °C                                      |

|                                            |                          |
|--------------------------------------------|--------------------------|
| Warranty (body, electronics, light source) | 60 months                |
| Net dimensions <b>L x W x H</b> [±2 mm]    | 384 mm x 121 mm x 246 mm |



\* Some of mounting methods are possible only with additional accessory dedicated for that product.