

INDUST V 1DF CBM H

TM-VP.DFCBM100H



No: 2625



No: 4956/2023
Valid until:
10.05.2028



No: 2625




No: 2625



No: DIT_004



No: V1.0

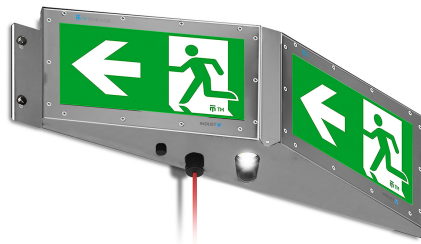

Producer **TM Technologie**
Application **evacuation route direction, tunnel lighting**

Family **INDUST V**

Version **CBM - Central addressable modulation battery**

Operating mode **CB**

Protection degree **IP66, IP69**

Impact protection degree **IK08**

Appliance classes **I**

Material **stainless steel**

Installation method* **surface, wall**

Luminous flux **>200 cd/m²**

Light source **LED**

Maximum light power **0.8 W**

Active power **7.8 W**

Nominal voltage AC **220-240 V**

Nominal voltage DC **186-254 V**

LED lifetime **50000 h**

Colour temperature **5700 K**

Minimum temperature **-25 °C**

Maximum temperature **+45 °C**

Warranty (body, electronics, light source) **60 months**

Net dimensions **L x W x H [±2 mm]** **760 mm x 158 mm x 244 mm**

